



Features

- Weighing, sample counting, and check HI-OK-LO
- Robust construction, easy to use
- Large LCD displays with backlit
- Rechargeable battery for up to 120 hours continuous use
- RS-232 connection to PC or external printer
- Optional relay output





Specifications

Display: 1.2" (30mm) height LCD display with LED backlit

Platter: Stainless steel, 8.7"x12.2" (220mmx310mm)

Rechargeable Ni-MH battery 6V/4Ah

Weighing Capacity: 6 lb, 15 lb, 30 lb, 60 lb
3 kg, 6 kg, 15 kg, 30 kg

Power Supply: Input AC 100V-240V, output 12V/1A

Interface: RS232


Product Weight: 9.3 lb (4.2 kg)

Product Size (LxWxH): 13"x13.6"x4.3" (33x34.5x11cm)

Gross Weight: 10 lb (4.5 kg)

Packing Dimension: 15"x15"x5.9" (38x38x15cm)

Operating Environment: -10°C to 40°C (14°F to 104°F)

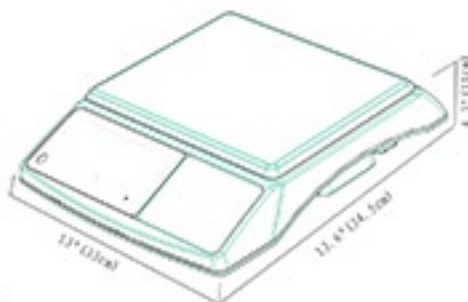

Product Order Information

Model	Capacity(kg)	Readability(g)	Capacity(lb)	Readability(lb)	Division
CWT7-3	3	0.1	6	0.0002	30000
CWT7-6	6	0.2	15	0.0005	30000
CWT7-15	15	0.5	30	0.001	30000
CWT7-30	30	1	60	0.002	30000
CWT7-30	15/3	0.5/1	3/6	0.001/0.002	3000
CWT7-60	3/6	1/2	6/15	0.002/0.005	3000
CWT7-150	6/15	2/5	15/30	0.005/0.01	3000
CWT7-300	15/30	5/10	30/60	0.01/0.02	3000

